

## Mono Omega touch 450



### Specifications(Omega Touch) 450


<b>Machine Height (mm)</b>	1,541
<b>Belt width (mm)</b>	869
<b>Belt length (mm)</b>	1,200
<b>Weight of cone soft massage (kg)</b>	185
<b>Weight (kg)</b>	210
<b>The richness of the powder (L)</b>	22.5

Power: Single phase, maximum current 13A for power supply

Electricity: 200V, 220V, 230V and 240V, 50 / 60Hz

Maximum Power Rating: 2.5kW Single Phase Using 13A Fuse

Noise Level: Less than 85 dB

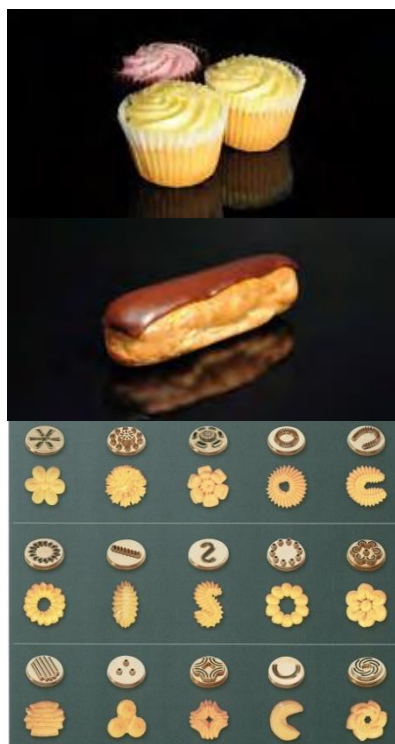

1. Produces up to 35 pieces per minute (depending on product)
2. Lifting platform up to 80 mm.
3. Set Weight, Height, Width  
And the shape of the product.
4. Touch screen control system.  
Up to 13 languages  
Produces up to 650 production records.
6. Can be used as a conveyor belt.  
Back up, scroll down, down by usage.
7. Produce a variety of products. Need
8. Supports 3 tray widths.